




ZTA Series Thru-Hole Ceramic Resonator

STANDARD SPECIFICATIONS							
Part Number	Frequency Range MHz.	Frequency Accuracy @ 25°C	Temperature Stability °C	Aging For 10 Years	Operating Temperature °C	C1	C2
ZTA-MG	1.80 ~5.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	30 pF	30 pF
ZTA-MT	5.01 ~13.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	15 pF	15 pF
ZTA-MX	13.01 ~50.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	5 pF	5 pF

Part Number Guide **Sample Part #: ZTA -MG - 2.00 -T**
ZTA – Package – Frequency – Packaging
Packaging: Blank = Bulk , -T = Tape and Reel

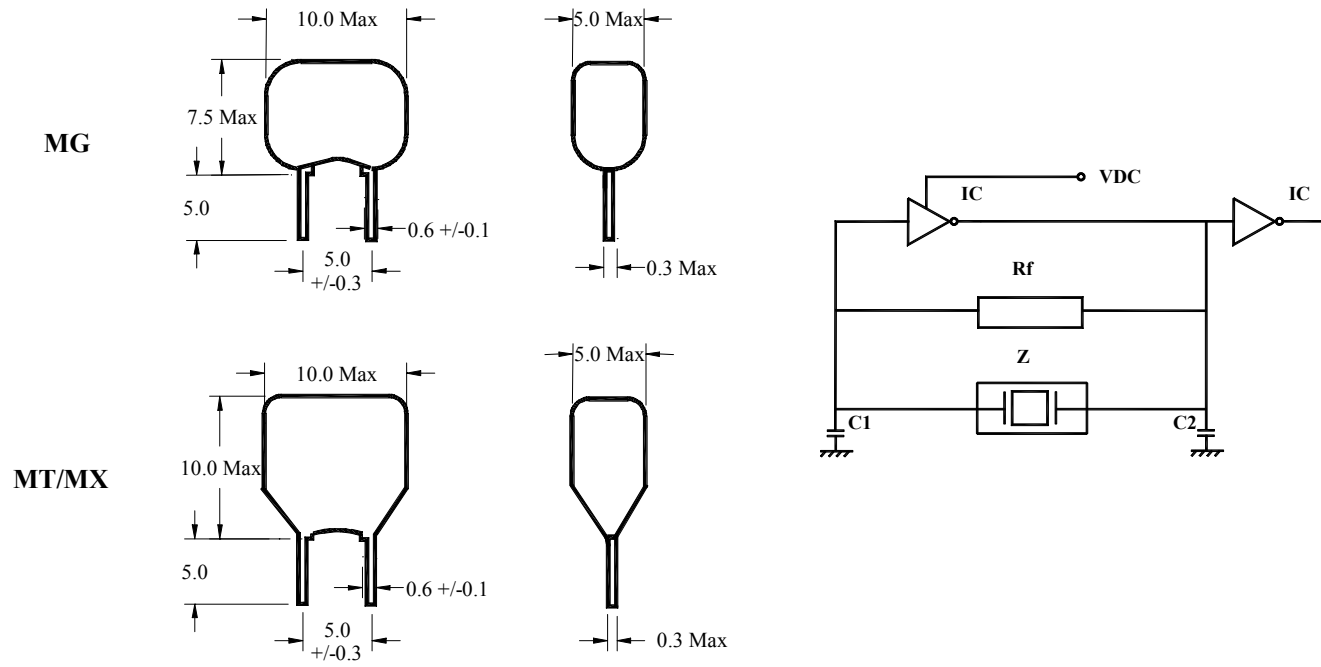

QVS TECH INC
 6965 El Camino Real, Ste 105 Carlsbad, CA 92009 Phone: 760-929-8677 Fax: 760-929-8077
 email: sales@qvstech.com

Specifications subject to change without notice (Rev A)