

QRS2 Series

SMD Ceramic Resonator 7.4x1.8mm

STANDARD SPECIFICATIONS


Part Number	Frequency Range MHz.	Frequency Accuracy @ 25°C	Temperature Stability °C	Aging For 10 Years	Operating Temperature °C	C1	C2
QRS2-MG	2.00 ~ 6.99	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	30 pF	30 pF
QRS2-MT	7.00 ~ 13.00	± 0.5%	± 0.4%	± 0.4%	-20 ~ +80	30 pF	30 pF
QRS2-MX	13.01 ~ 20.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	30 pF	30 pF
QRS2-MX	20.01 ~ 25.99	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	15 pF	15 pF
QRS2-MX	26.00 ~ 35.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	5 pF	5 pF

Part Number Guide


Sample Part #: **QRS2 -MG - 2.00 -T**

QRS2 – Package – Frequency – Packaging

Packaging: Blank = Bulk , -T = Tape and Reel

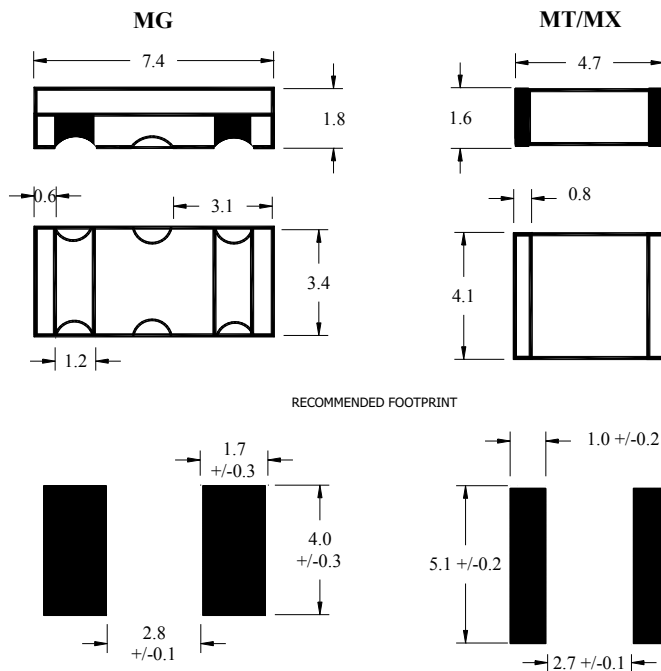

DIMENSION UNITS: mm



MG / MT IC: C D 4069 UBPX2
MX IC: T C 74HCU04

QVS TECH INC

6965 El Camino Real, Ste 105 Carlsbad, CA 92009 Phone: 760-929-8677 Fax: 760-929-8077

Email: sales@qvstech.com

Specifications subject to change without notice (Rev A)