


## SMD Ceramic Resonator, 7.4x1.8mm, with Internal Capacitors

STANDARD SPECIFICATIONS							
Part Number	Frequency Range MHz.	Frequency Accuracy @ 25°C	Temperature Stability °C	Aging For 10 Years	Operating Temperature °C	C1	C2
QRS3-MG	2.00 ~ 6.99	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	30 pF	30 pF
QRS3-MT	7.00 ~ 13.00	± 0.5%	± 0.4%	± 0.4%	-20 ~ +80	30 pF	30 pF
QRS3-MX	13.01 ~ 20.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	30 pF	30 pF
QRS3-MX	20.01 ~ 25.99	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	15pF	15 pF
QRS3-MX	26.00 ~ 35.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	5 pF	5 pF

**Part Number Guide**                      **Sample Part #: QRS3 -MG - 2.00 -T**  
**QRS3 – Package – Frequency – Packaging**  
**Packaging: Blank = Bulk , -T = Tape and Reel**

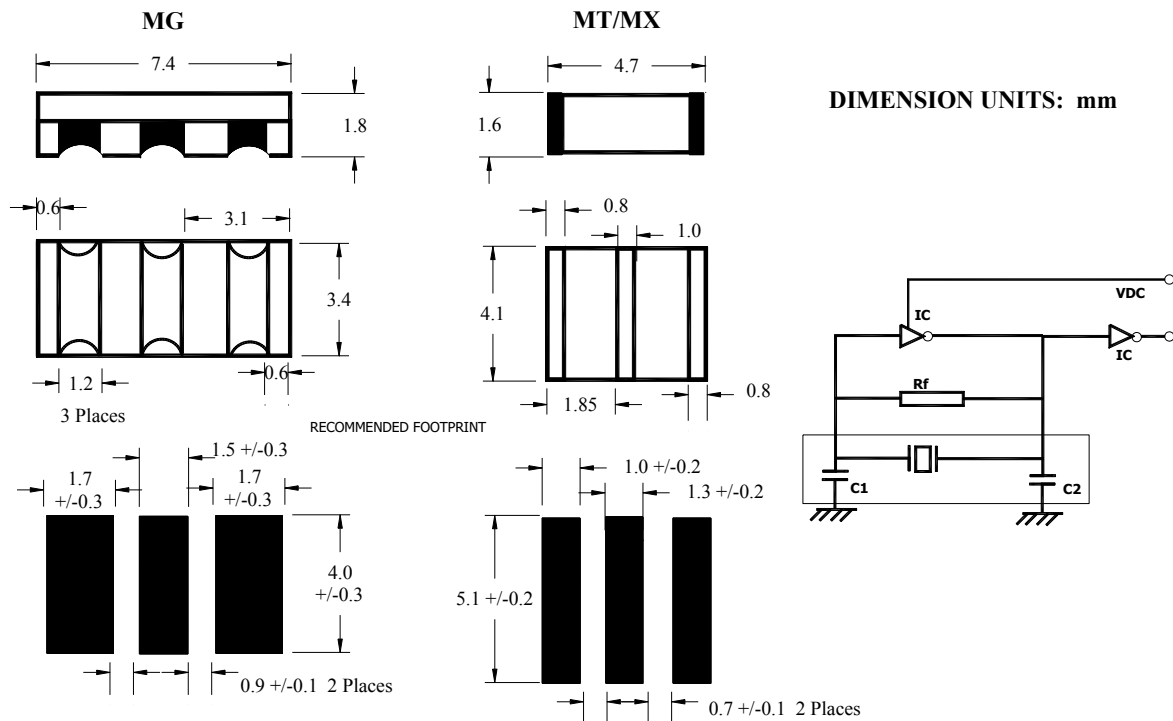

**QVS TECH INC**

6965 El Camino Real, Ste 105 Carlsbad, CA 92009 Phone: 760-929-8677 Fax: 760-929-8077

Email: [sales@qvstech.com](mailto:sales@qvstech.com)

Specifications subject to change without notice (Rev A)