


# QVS49P4/P8 Series

SMD Crystal, 4 pads, 12.5×5×5mm

STANDARD SPECIFICATIONS										
Frequency Range (MHz)	3.2~3.49	3.5~3.9	4.0~4.9	5.0~5.9	6.0~6.9	7.0~8.9	9.0~12.9	13.0~19.9	20.0~36.0	27.0~100
Frequency Tolerance (25°C)	± 50ppm Standard (see Crystal Part Number Guide for more details)									
Crystal Cut	AT Cut (Standard) or BT Cut									
Load Capacitance (CL)	18pF Standard (see Crystal Part Number Guide for more details)									
Shunt Capacitance (Co)	7pF Max									
Equivalent Series Resistance (Ω)	300	200	150	120	100	80	60	40	30	3 <sup>rd</sup> OT 100
Drive Level	200μW(3.5MHz ~ 10MHz), 500μW(>10MHz)									
Aging	± 5 ppm max/ year									
Frequency Stability Over Temp.	±100ppm Standard (see Crystal Part Number Guide for more details)									
Operating Temperature Range	0 °C ~+70 °C Standard (see Crystal Part Number Guide for more details)									
Storage Temperature Range	-40 °C ~+85 °C Standard									
<b>Ordering Instructions (see Crystal Part Number Guide for more details)</b> <b>Example: QVS Part # = QVS49P4-21AF18-20.000</b>										
QVS49P4-	±50ppm(@ 25°) 2	±100ppm(Over Temp) 1	0°C ~ +70°C A	Fundamental F	Load Cap. 18pF	Frequency -20.000MHz.				

\* See Engineering-Technical Info for Solder Re-flow and Tape and Reel Specs.

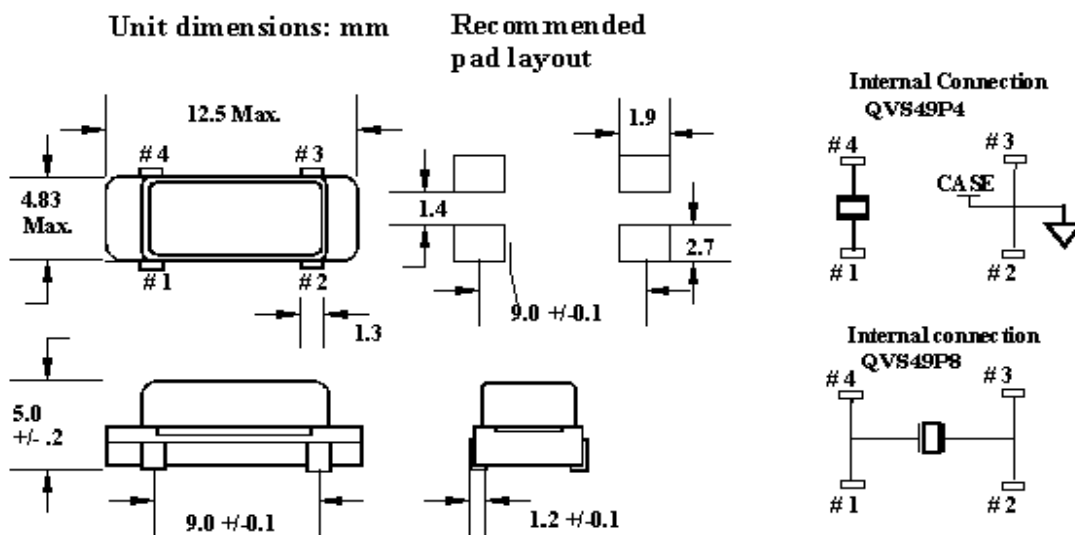

**QVS TECH INC**

6965 El Camino Real, Ste 105 Carlsbad, CA 92009 Phone: 760-929-8677 Fax: 760-929-8077

email: [sales@qvstech.com](mailto:sales@qvstech.com)

Specifications subject to change without notice (Rev B)