

## Thru-Hole Ceramic Resonator with built-in capacitors

### STANDARD SPECIFICATIONS


Part Number	Frequency Range MHz.	Frequency Accuracy @ 25°C	Temperature Stability °C	Aging For 10 Years	Operating Temperature °C	C1	C2
ZTT-MG	1.80 ~5.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	22 pF	22 pF
ZTT-MT	5.01 ~13.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	22pF	22 pF
ZTT-MX	13.01 ~20.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	22 pF	22 pF
ZTT-MX	20.01 ~25.99	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	15pF	15 pF
ZTT-MX	26.00 ~50.00	± 0.5%	± 0.3%	± 0.3%	-20 ~ +80	5 pF	5 pF

#### Part Number Guide


Sample Part #: **ZTT -MG - 2.00 -T**

**ZTT – Package – Frequency – Packaging**

**Packaging: Blank = Bulk , -T = Tape and Reel**

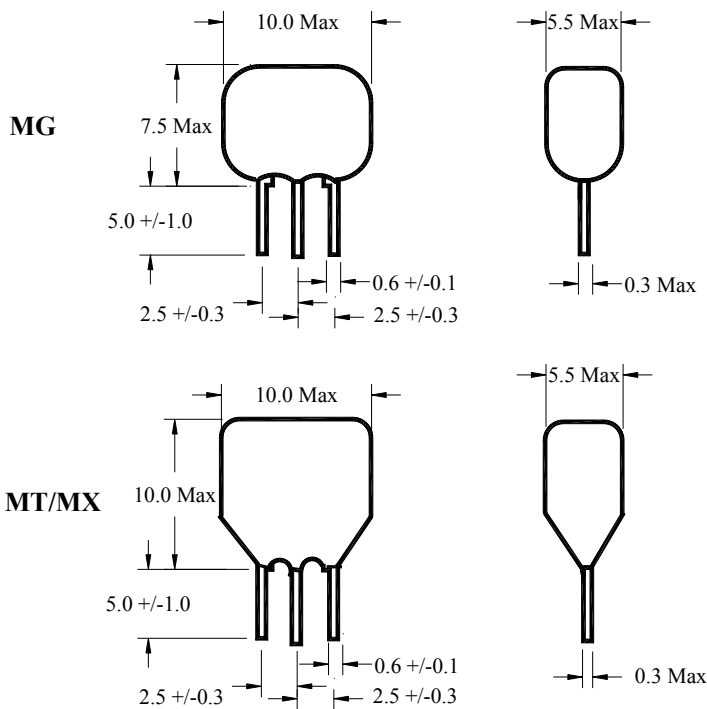

**DIMENSION UNITS: mm**

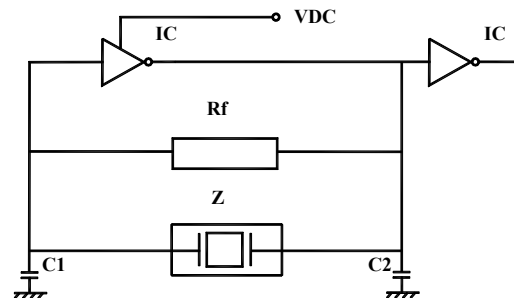

### QVS TECH INC

6965 El Camino Real, Ste 105 Carlsbad, CA 92009 Phone: 760-929-8677 Fax: 760-929-8077

Email: [sales@qvstech.com](mailto:sales@qvstech.com)

Specifications subject to change without notice (Rev A)